

INDUCTIVE MOORING LINE MODEM



BRING YOUR DATA
TO THE SURFACE

Supporting as many instruments as required and operating at the baudrate of 4800 over an insulated mooring line of more than 4km length, the RBR inductive mooring line modem can meet any challenge. It is a simple, strong, fast, and flexible solution to bring your data to the surface.

FEATURES



Easy system
integration



Low power
consumption



Fast data
transmission



Flexible
configurations



Robust and
reliable



RS-232
output

The inductive mooring line modem consists of the head-end modem (HEM) and one or more sub-surface modems (SSM). Each instrument on the mooring line system is connected to an SSM, which communicates inductively with the HEM through the mooring cable.

The main features of the inductive mooring line modem are a fast communication rate along the mooring line, shock protected ferrites, no pre-deployment configuration required, an automated instrument discovery mechanism, and an intelligent addressing mechanism that conserves power. A comprehensive set of system commands is available to query or command the instruments to identify themselves, take a sample, and transmit data. Instruments may be addressed individually, in sub-groups, or all at once.

The SSM is available as an integral option for RBR instruments, attached as the battery end-cap via a coupler. Alternatively, use it as a standalone cabled version for serial connection to an RBR instrument in combination with the RBR*fermata* battery canister, or to a third-party instrument, such as ADCP.

INDUCTIVE MOORING LINE MODEM

BRING YOUR DATA TO THE SURFACE

Specifications

Inductive link


Baudrate	4800baud
Mooring line	Ø5 – 15mm

HEM (head-end modem)

Serial communication	Up to 115000baud
Polling mode	Scheduled or interactive
Addressing mode	Individual, group, or all
Voltage	9.5V to 22V
Power consumption	40µA sleep, ≤5mA active @ 12V
Temperature range	-30°C to 60°C
Clock accuracy	±60 seconds/year
Housing	Weatherproof
Dimensions	225mm x 125mm x 85mm

SSM (sub-surface modem)

Serial communication	4800 to 19200baud
Voltage	
External	8V to 22V
On battery	2V to 8V
Power consumption	
External	40µA sleep, ≤3mA active @12V
On battery	120µA sleep, ≤5mA active @7V
Temperature range	-10°C to 50°C
Housing	Plastic or Ti
Dimensions	
Plastic	310mm x Ø63.3mm
Ti	328mm x Ø60.3mm
Depth rating	
Plastic	750m
Ti	>2000m

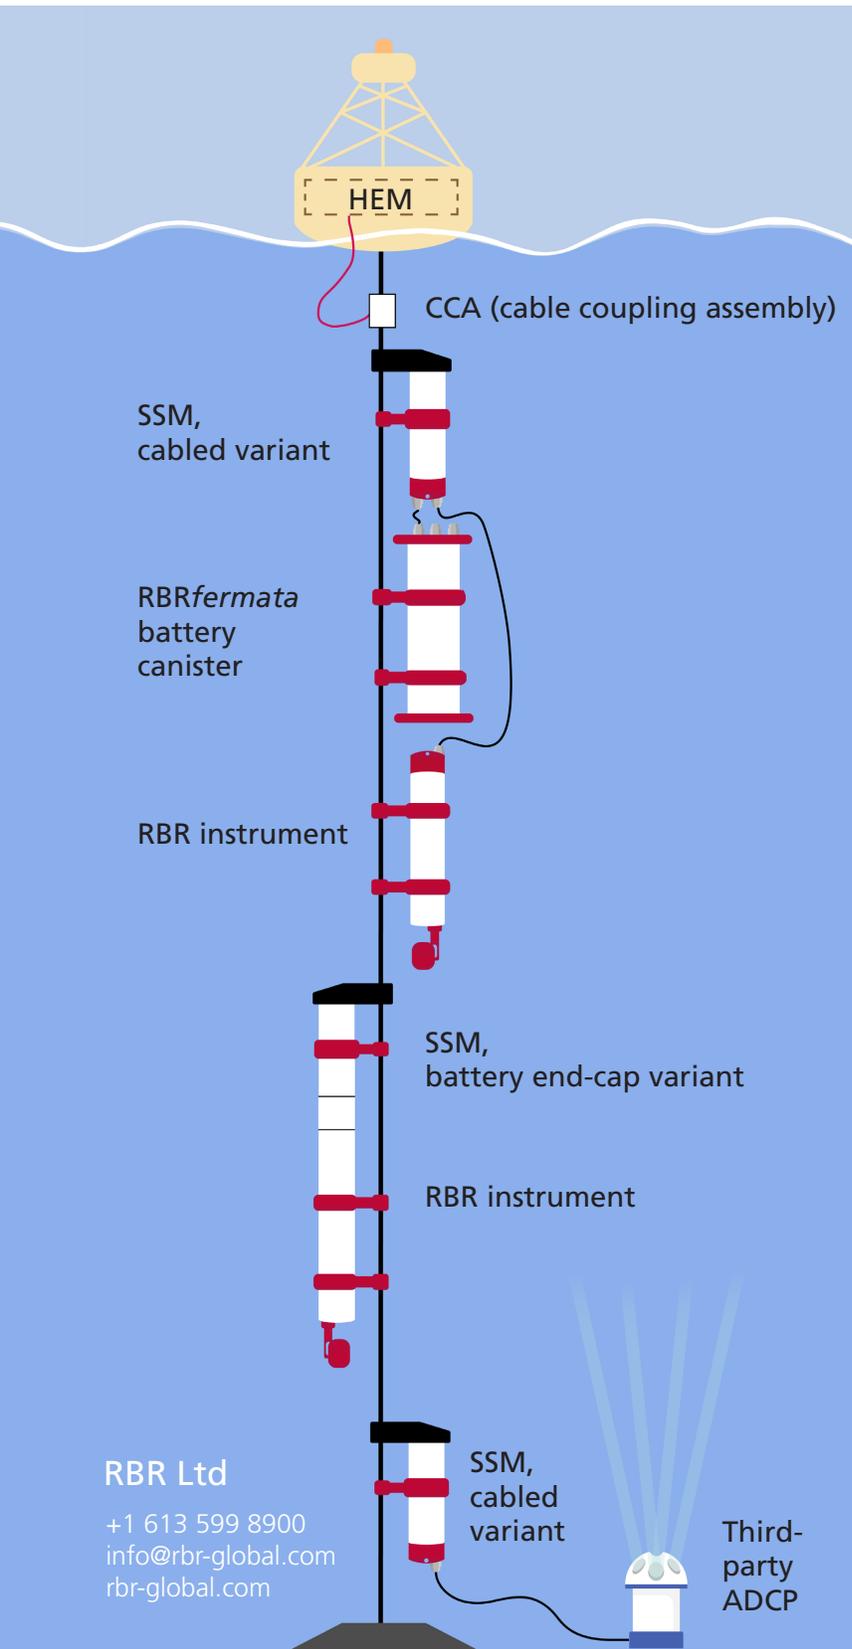

RBR Ltd
 +1 613 599 8900
 info@rbr-global.com
 rbr-global.com

